

BrightSign Basics

BrightSign Basics

source: Job van Nuenen, edited by Veerle en Simone van Blackbox PT/IBB


This Bookstack is under construction, some information might be missing

Wat are BrightSigns?

BrightSigns are digital media players, that you can use to run multiple video's on multiple output displays, such as TV screens, PC monitors and Projectors. They are commonly used in multimedia artworks and presentations because:

- They do not require you to keep your laptop connected to the installation
- They are able to sync together, so you can run multiple video's on multiple displays, that are timed together to start and stop.
- Available from rentals of HKU and are considered reliable for use during presentations and expo's.
- Unlike using Raspberry Pi's, you don't need to install the initial software of an PI to run it.

But that does not mean a PI could not do the same job, [research](#) comparisons between the two and decide accordingly.

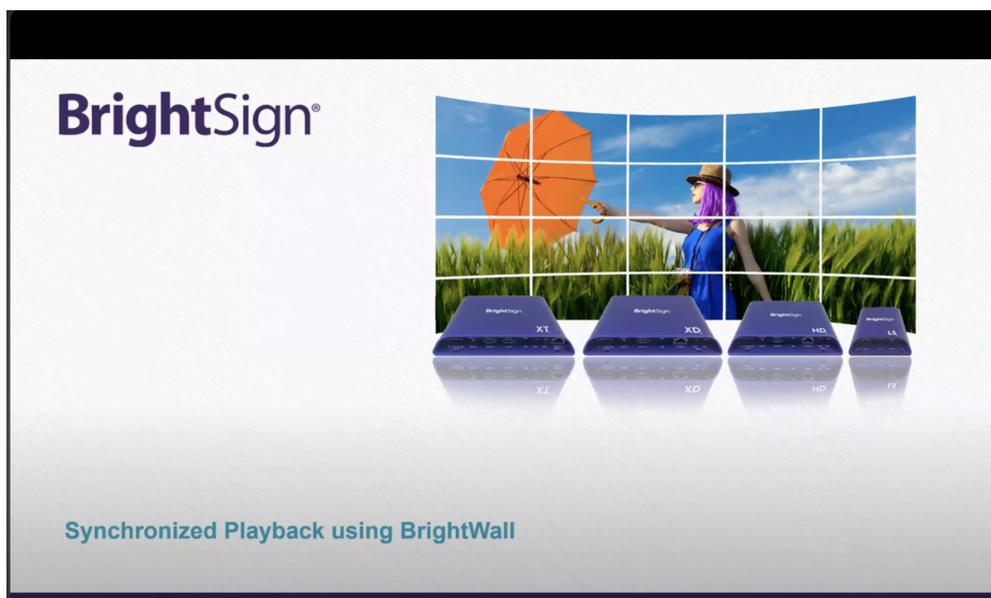

Software

Software mogelijk voor Windows en Mac om een BrightWall op te zetten met BrightSigns. Er zijn wel verschillende stappen nodig om de spelers onderling via een netwerkswitch (meer dan 2 players) te verbinden en juiste manier alles installeren.

Op de website via BrightSign vind je de [QUICKSTART GUIDE](#) voor installatie software.

<https://www.brightsign.biz/resources/quickstart-guide/>

A BrightSign can be setup via either SD card, or software running on your PC. After setup, you are able to run the device standalone.



1. Download and Install BrightAuthor:connected

Download BrightAuthor:connected desktop application.

[Download for PC →](#)

[Download for MAC →](#)



2. Setup Control Cloud Account and Network

- ✓ Open BrightAuthor:connected and click connect
- ✓ Sign up for BSN.cloud as a new user
- ✓ Validate email
- ✓ Return to BrightAuthor:connected
- ✓ Click on the orange connect button
- ✓ Sign in, name your network, and click create



3. Provision Players

- ✓ Connect your players to a live internet connection via Ethernet
- ✓ Connect player to screen via HDMI
- ✓ Power on your players with a blank SD card
- ✓ Click Activate Player on your BrightAuthor:connected dashboard and enter the activation code that appears on the purple screen of your connected display
- ✓ Your player will now go through setup and reboot several times during this process

Resolution and Image

Zolang je maar het juiste fileformat in een resolutie die je monitor aan kan op het (lege, geformatteerde) kaartje zet. Een 4k iPhone filmpje op de BrightSign is mogelijk, maar dan moet de video output technologie (zoals beeldscherm of projector) ook matchen met de resolutie van de video.

De brightSign schakelt zijn output naar de resolutie van de file die er op staat, dus als de aangesloten monitor geen 4K ondersteunt (en veel HKU monitoren en projectoren doen dat niet...) krijg je geen beeld.

Lees je goed in of je BrightSign überhaupt 4K support, en hoe je deze het beste kunt aansturen via PC of SD.

On the BrightSign website you find information about video output formats [here!](#)

Info on codecs & formats [here](#)

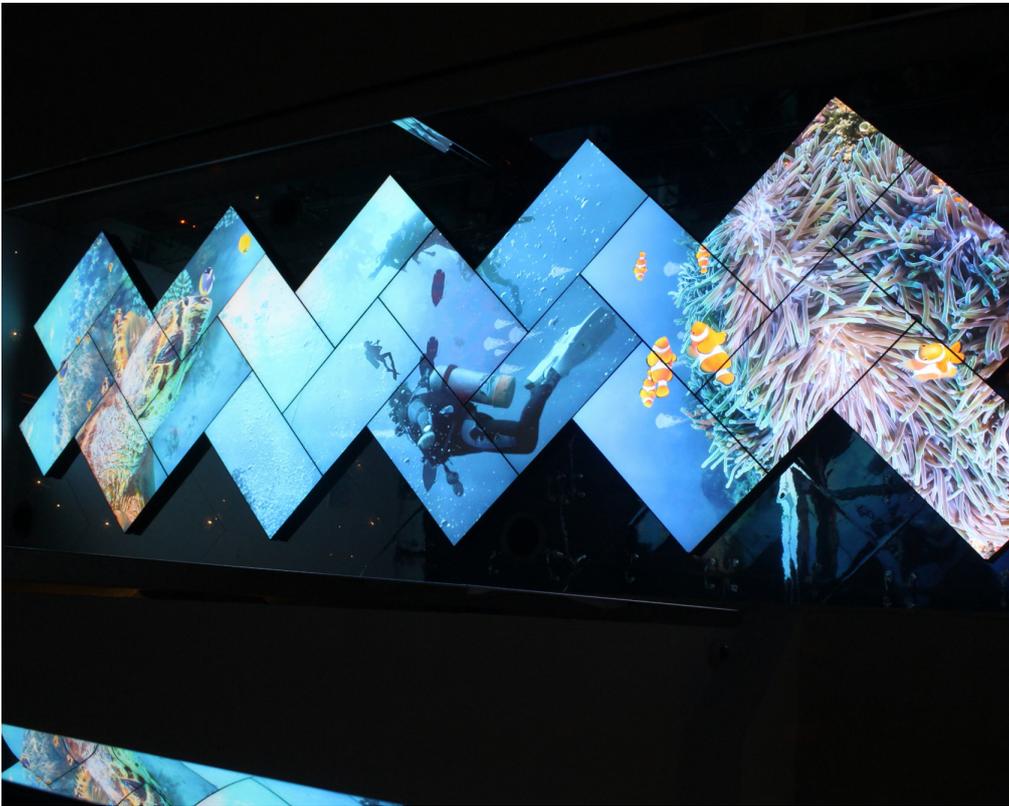


image from [this article](#) about BrightSigns used in Video Wall

Some Notes about use of BrightSigns at HKU

- BrightSigns used for syncing image need to be from the **same type**. You cannot connect a LS4 with a LS5 as far as we know.
- **BrightAuthor** software used in BrightWalls only runs on **Windows**.
- **BrightAuthor:connected** runs on **Windows and Mac**, but cannot run multiple screens in sync!
- If you have *one* video image that you want to divide over multiple screens, you have to manually cut up your original video in desired slices (using software such as Adobe After Effects or Premiere) and render these into separate HD/4k files.
- Files need to be decoded **within the specs** of the exact BrightSign model:
<https://support.brightsign.biz/hc/en-us/articles/218065907-Which-factors-can-affect-synchronization>
- The files need to be made **within the settings** that were chosen for the BrightWall. (example 1920 x 1080 50p) You cannot make files that are larger than the format you want to output your screens to. This to avoid falling out of [sync or other problems](#).

BrightSigns not displaying any output!

Screens that are connected to BrightSign players need to be able to handle the resolution of what the player wants to output. If you shoot a 4K video, but the monitor or projector that you are displaying your video on can only handle Full HD, the output of the BrightSign will automatically switch to 4K as well.

This means the monitor will very most likely **not display any image at all** and turns black! It cannot display the 4K resolution given by the media player, so it displays nothing.

BrightSigns installations startup instruction for a BrightWall

1. When everything is connected in your setup,. make sure that the network switch you are using (in case of multiple media player setups) is switched on first.
2. After the network switch is turned on, start the other BrightSign players one by one.
3. Have patience, sometimes the media players will restart multiple times before they found each other.
4. During this resetting, the Monitor screens/Projectors might lose signal in the process.
5. When media players have found each other and the programs are running, the video(s) will start playing.

when in the author process within BrightAuthor you have selected the "Identity player during startup" option, the player will display a title screen with "Screen X"/name of your screen to determine which player it is connected to.

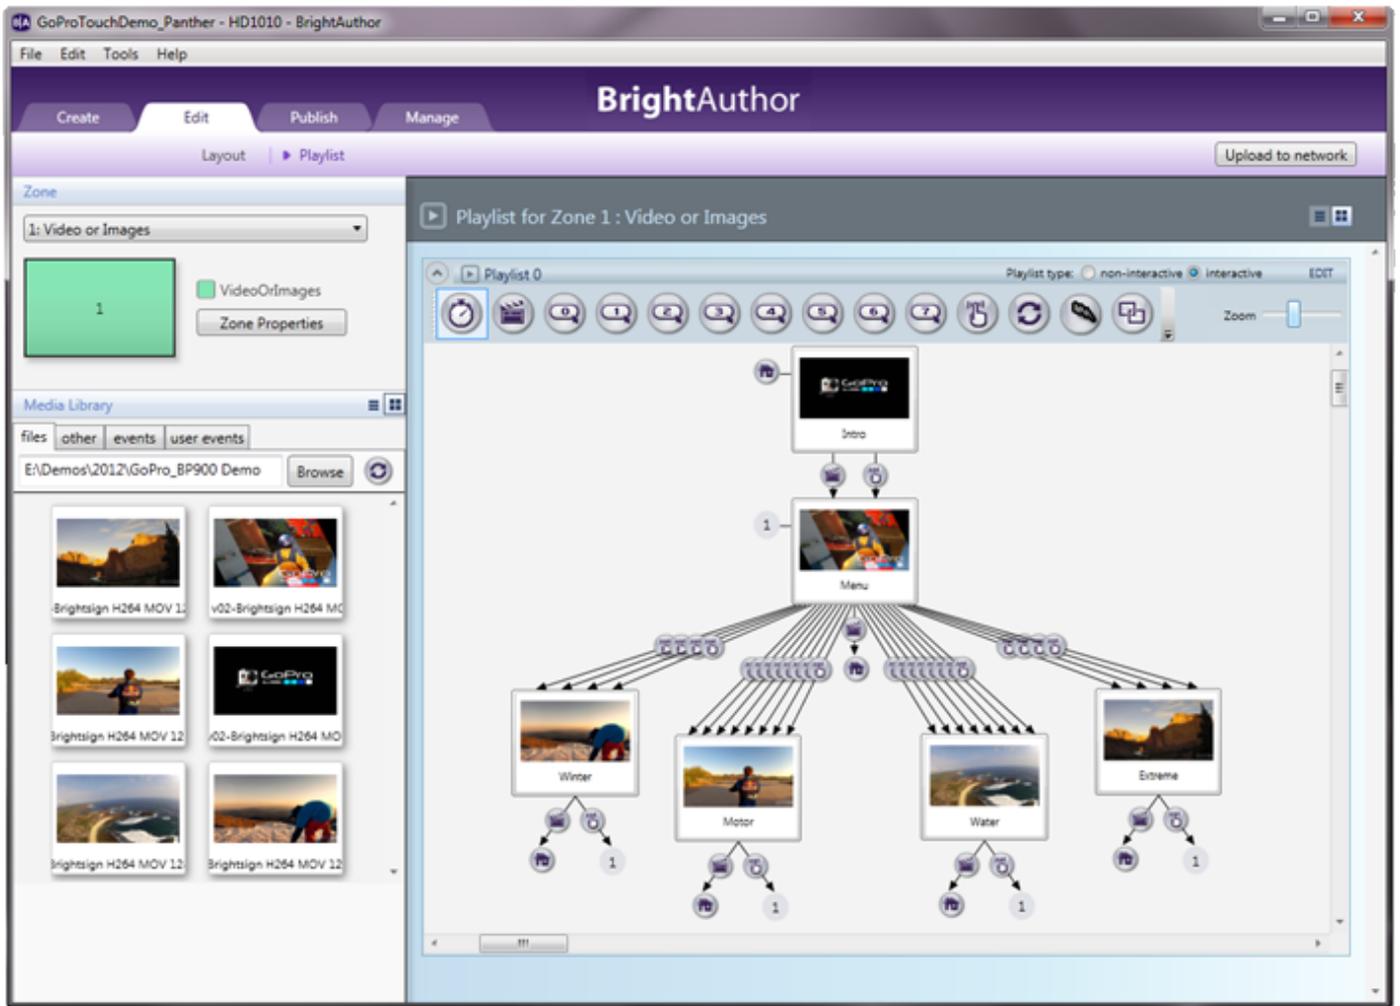


image displaying the BrightAuthor software and a possible multi video BrightWall Setup ([reference here](#))

Revision #7

Created 8 February 2024 14:19:28 by Simone

Updated 26 March 2024 09:22:19 by Astrid