


# Installation instruction Isadora 4 USB Key Version with USB key license

To be able to save your work in Isadora, the HKU lending and the Blackboxes have USB keys. Below is an instruction:

Download the “Isadora 4 USB key Version” for Windows or MacOS at



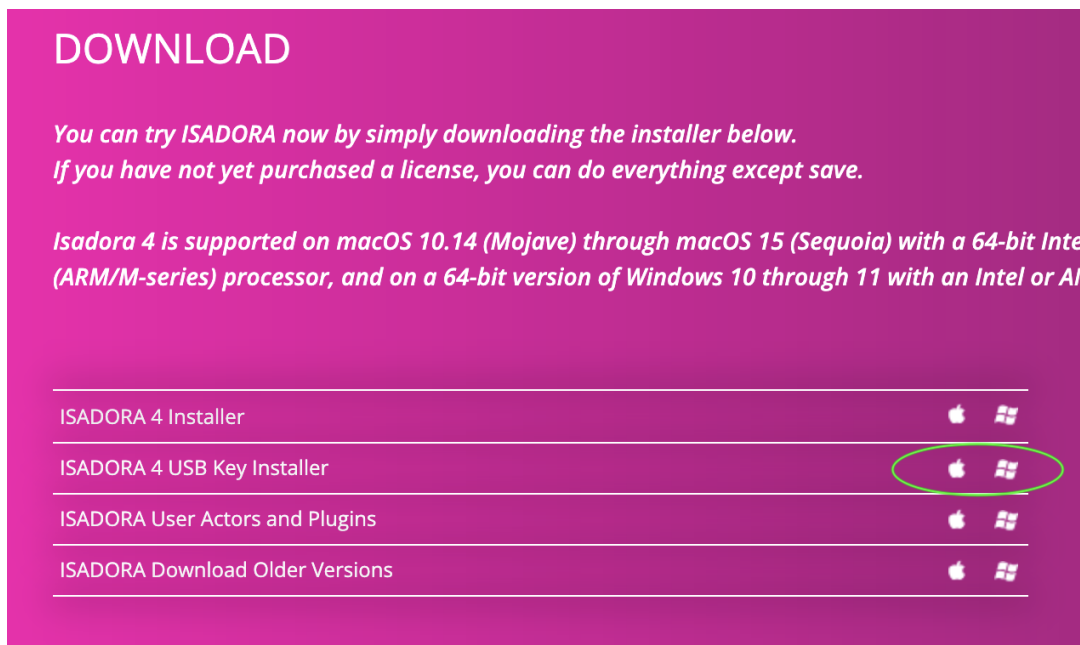





1. <https://troikatronix.com/get-it/> under the Downloads heading.



**DOWNLOAD**

*You can try ISADORA now by simply downloading the installer below.  
If you have not yet purchased a license, you can do everything except save.*






*Isadora 4 is supported on macOS 10.14 (Mojave) through macOS 15 (Sequoia) with a 64-bit Intel (ARM/M-series) processor, and on a 64-bit version of Windows 10 through 11 with an Intel or AMD processor.*

ISADORA 4 Installer	 
ISADORA 4 USB Key Installer	 
ISADORA User Actors and Plugins	 
ISADORA Download Older Versions	 

2. Under the heading “Related Downloads” click on “USB key Version” for Windows or MacOS. Another page appears.

## RELATED DOWNLOADS

*USB Key drivers, development kits, examples, manuals and more*

USB Key Driver (Required if you use a USB Key)	
Isadora Software Development Kit	
Isadora Examples	
Isadora 4 Manual (PDF) English	
Isadora 3 Manual (PDF) Spanish	

3. Scroll to the bottom of the page and click on the correct USB key driver download link for your platform (Windows or MacOS). You will be redirected to the THALES website.

### DOWNLOAD THE USB KEY DRIVERS

**Important! Only install the latest USB key drivers if you have read all of the information above!**

Here are the links to the latest USB key drivers from Thales

[Download the USB Key Drivers for macOS \(Intel / Apple silicon\)](#)

[Download the USB Key Drivers for Windows \(Intel\)](#)

4. Click on the “Sentinel® LDK and Sentinel HASP® Run-time Environment Installer GUI” download link.

## Sentinel HASP/LDK Mac OS X Runtime GUI Installation 8.53

KB0018323

Article Details KB0018323

👁 41,303 Views • 📅 Updated: 2022-12-12 • 🗓 Created: 2018-12-10 • ★★★★★

Sentinel® LDK and Sentinel HASP® Run-time Environment Installer for Mac OS X  
Refer to the Readme file included in the package for details.

Click here to download file: [DOW0003350](#)

md5hash: 3983e860fabfa0fdedbc17236baf16f3

Filename: Sentinel\_Runtime.dmg

File Size: 7.84 MB

5. A pop-up screen appears with the “End User License Agreement”. Scroll down and click “I accept”

### End User License Agreement

#### SENTINEL LDK PRODUCT END USER LICENSE AGREEMENT

**IMPORTANT INFORMATION** - PLEASE READ THIS AGREEMENT CAREFULLY BEFORE USING THE CONTENTS OF THE PACKAGE AND/OR BEFORE DOWNLOADING OR INSTALLING THE SOFTWARE PRODUCT. ALL ORDERS FOR AND USE OF THE



Scroll down aaaaaaaa!!!!!!!! the way

Y. OpenJDK8 is distributed under CDDL License and Gplv2 classpath exception license:  
<https://oss.oracle.com/licenses/CDDL+GPL-1.1>

DocID 189 Revision 2110-1

✓ I accept

✗ I do not accept

6. Install the Sentinel USB key for Windows or MacOS.


7. Install "Isadora 4 USB Key Version."

8. Insert the physical Isadora USB Key into the USB port and boot up Isadora (you can do this at a later time if you do not currently have access to a USB Key).


9. If it's your first time booting up Isadora, you may have to give Isadora some permissions, like access to microphone and webcam. Click accept on these prompts (if you wish to use these as a sensor for example).

If you wish to work with projection mapping, it is important to turn off 'Displays have separate spaces'. For Mac, you can find it under System settings -> Desktop & Dock -> Displays have separate spaces (scroll all the way down). Turn it off.

You may have to restart your computer to let these changes go into effect

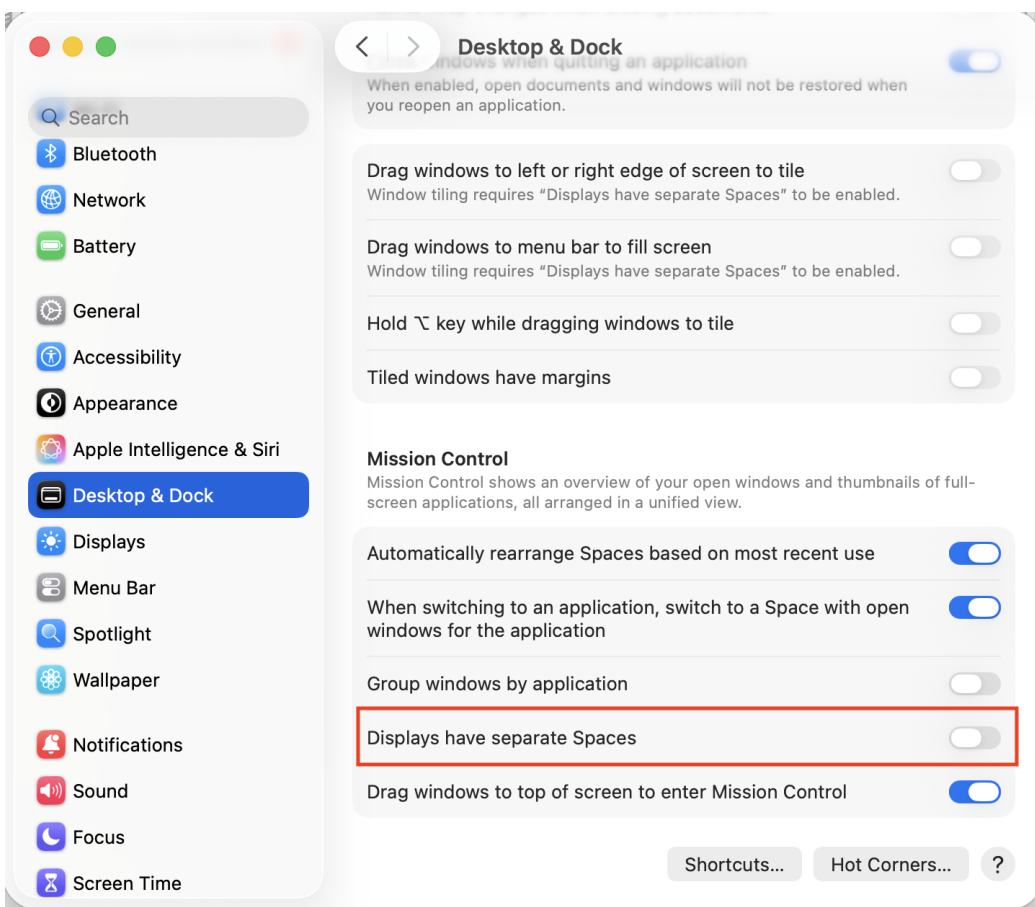

**10.** In the Isadora menu bar, go to Help -> Register

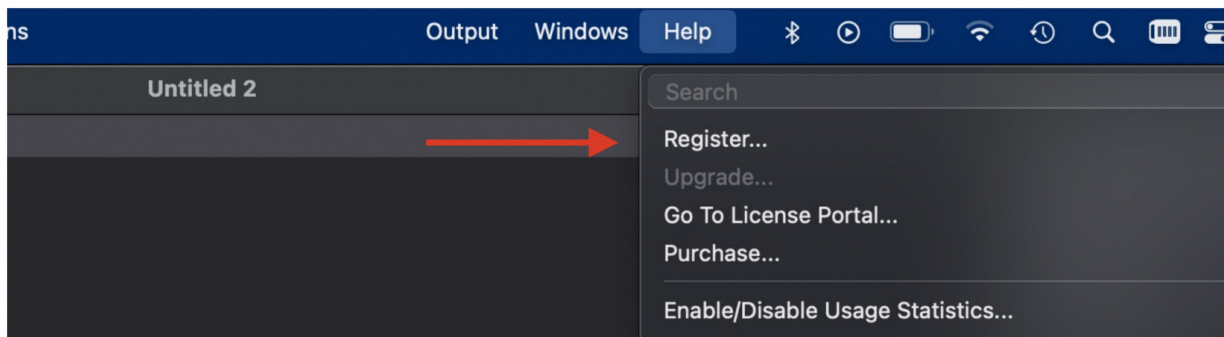

**11.** Copy the code that you receive from a teacher or workshop employee or can find in the landing environment and paste it in the empty registration field.

Isadora 3 USB Key versie voorbeeldcode:

```
XXXX257EA32EA87D404C09C778AABE2E  
9D98E085117E362D20CA112C5ED95387  
76818AAA7A90CE39D8271BCC455AC2C6  
79B619F49D41F71C5F2C1011C5576D1F  
4A71091A0484827349B08E6B4A4B51D5  
6C9E39DC509B20A078A98E3D4C23XXXX
```

**12.** You can now save Isadora patches with the USB key. Have fun!

Note!: If you use a USB (C) adapter, make sure that it stays in place properly. Connection to isadora and the dongle will be disconnected if the adapter moves or becomes loose. Then you cannot save your patch. So save your work regularly.

Note2: if you are on an ARM Mac, running plugins like for the Kinect, Isadora may flash a popup that you need to [run Isadora](#)

[with Rosetta mode; here's how](#)

---

Revision #14

Created 2023-03-28 15:18:18 UTC by Tjerk

Updated 2026-02-24 11:41:54 UTC by Daan